



CAPACITORS FOR AUTOMOTIVE APPLICATIONS

- MKP CAPACITORS
- MKT CAPACITORS
- X2 CAPACITORS
- Y2 CAPACITORS
- POWER CAPACITORS

GENERAL DATA ABOUT ISKRA

THE STRENGTH OF THE COMPANY ISKRA LIES NOT ONLY IN ITS PRODUCTS AND TECHNOLOGY, BUT ALSO IN THE COMPANY'S HISTORY, WRITTEN BY INVENTORS, WORKERS AND SKILLED ENGINEERS.

TODAY ISKRA COMPANY IS **PRESENT IN MORE THAN 80 COUNTRIES** WITH A GLOBAL SALES NETWORK, IT IS THE REGIONAL **LEADING MANUFACTURER OF INDUSTRIAL SOLUTIONS AND CUTTING EDGE ELECTROTECHNICAL PRODUCTS.**


- FOUNDED IN 1946, **70 YEARS OF TRADITION**,
- **1400** EMPLOYEES,
- **6 PRODUCTION PLANTS:**
KRANJ, SEMIČ, ŠENTVID PRI STIČNI, GLINEK, LJUBLJANA, LAKTAŠI (BIH),
- **81 R&D** EMPLOYEES,
- **4 R&D** DEPARTMENTS
- **1 LABORATORY FOR CALIBRATION** (ACCORDING TO IEC 17025:2005 STANDARD),
- **CERTIFICATES:** CE, VDE, UL, NF, SEMKO, CRS, GOST, LLOYDS, CQC, CSA, ATEX QAN, IECEX,
- **STANDARDS:** ISO 9001:2015, ISO 14001:2015, IEC 60384-1, IEC 60384-2, IEC 60384-13, IEC 60384-14, IEC 60384-16, IEC 60384-17, IEC 61071, AEC-Q200 (ON REQUEST)

ABOUT CAPACITORS

- **MODIFICATION CAPACITORS** FOR CUSTOMER REQUEST
- **DESIGN ALL SEMI-PRODUCTS** FOR CAPACITOR
- **AUTOMATIZATION OF IMPORTANT PROCESSES** (METALLIZATION, WINDING, SPRAYING, IMPREGNATION, ASSEMBLING, SEALING, MEASUREMENTS)
- **HIGH SAFETY PRODUCTS** - DESIGN ACCORDING TO INTERNATIONAL SAFETY STANDARDS
- **APPROVALS FOR OUR PRODUCTS** (UL, EN, CSA) AND USE OF UL APPROVED MATERIALS
- PROCESS STABILITY
- QUALITY CERTIFIED ACCORDING TO **ISO 9001 AND ISO 14001**
- DEVELOPMENT **NEW TECHNOLOGY** AND **MEASURING PROTOCOL**
- BUILT IN THE **ECOLOGICAL SUITABLE ROW MATERIALS**
- USE OF **MODERN QUALITY TOOLS**
- **FLEXIBILITY AND QUICK RESPONSIVENESS** - OWN CONSTRUCTION AND PRODUCTION OF TOOLS AND MACHINERY



CAPACITORS FOR AUTOMOTIVE APPLICATIONS

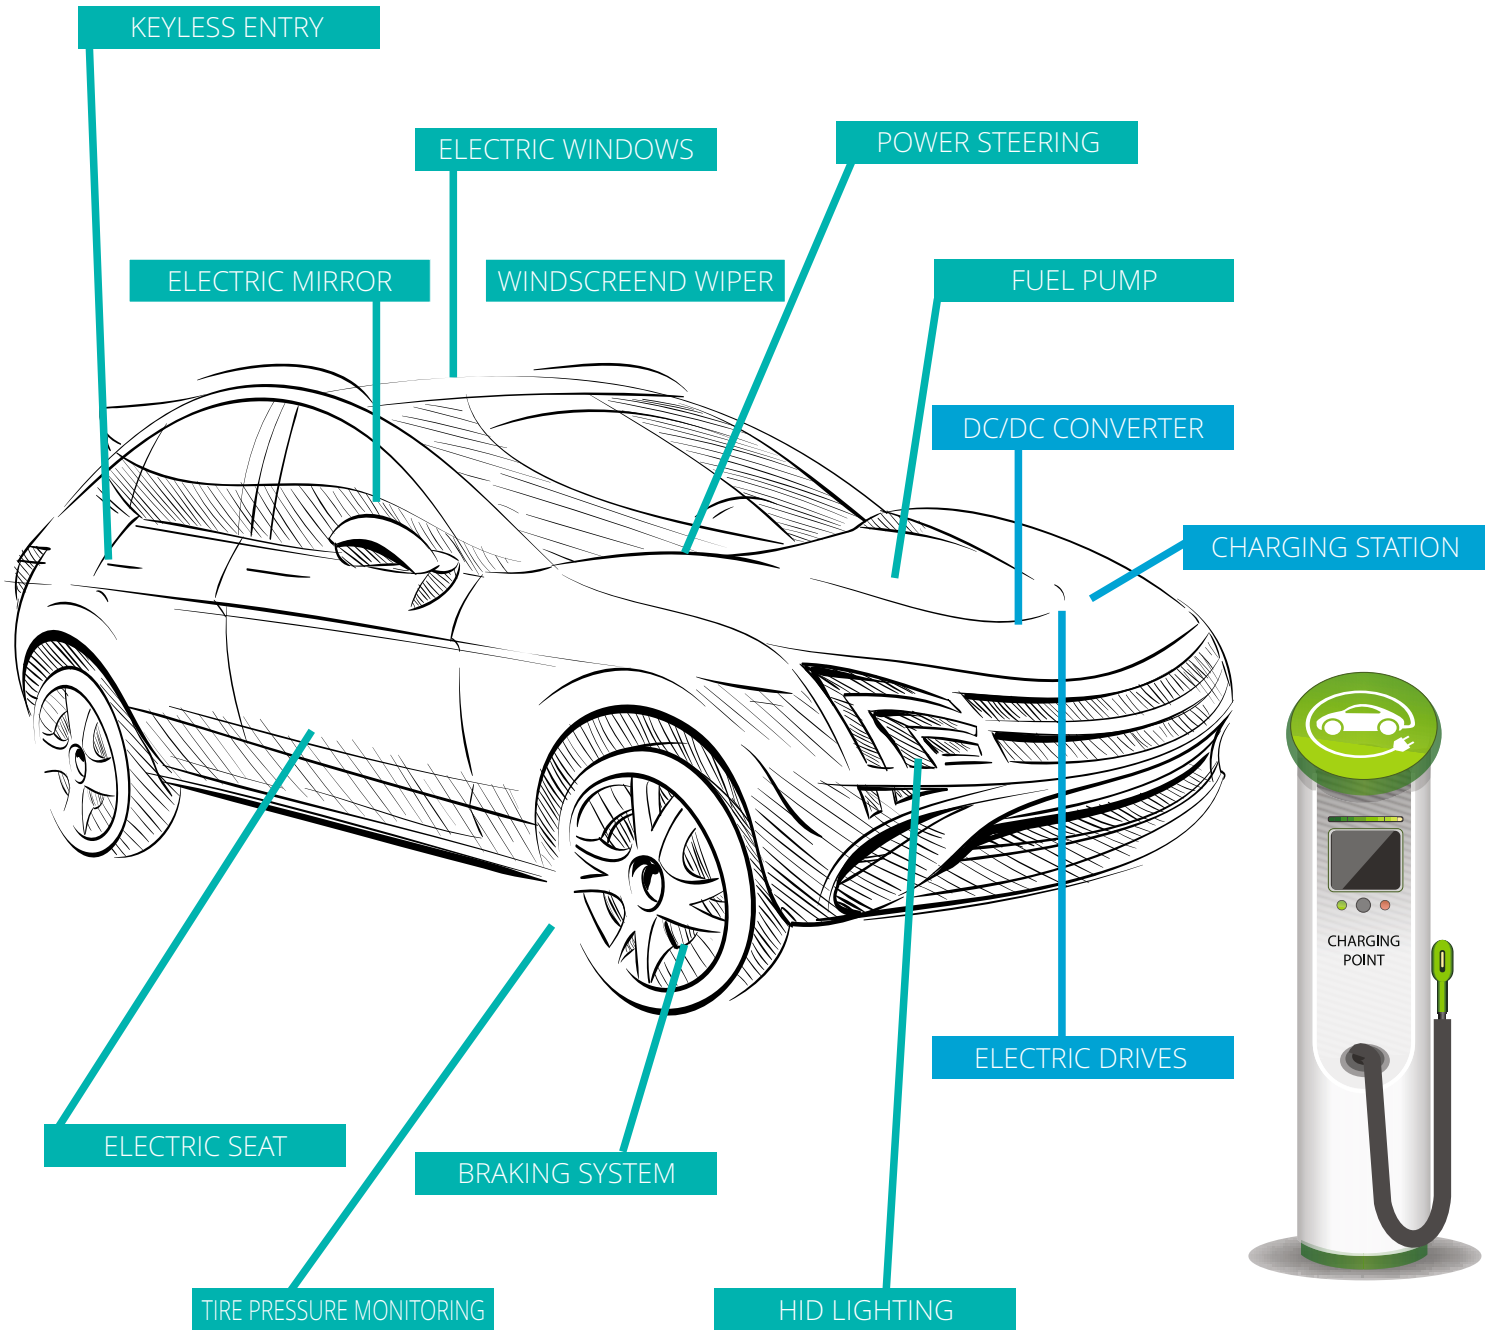


USE IN ELECTRONICS


APPLICATION	POWERTRAIN			SAFETY			COMFORT APPLICATION					
	DC/DC CONVERTER, INVERTER	EV CHARGING STATION	FUEL PUMP	BRAKING SYSTEM (ABS/ESC)	TIRE PRESSURE MONITORING	HID LAMPS	ELECTRIC MIRROR	KEYLESS ENTRY	ELECTRIC SEAT	ELECTRIC WINDOWS	WINDSCREEN WIPER	POWER STEERING
MKP	●	●				●	●	●	●	●	●	●
MKT CAPACITORS			●	●	●		●		●	●	●	●
X2, Y2 CAPACITORS	●	●							●			
POWER CAPACITORS	●	●										

MKP CAPACITORS


KLI1910



KNI1910



KNU1910




- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: METAL FOIL AND METALLIZED
- CAPACITOR RANGE: 1000 pF - 0.22 μ F
- RATED DC VOLTAGE: 100 - 2000 V
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$, $\pm 20\%$
- PULSE LOADING: 2200 - 20500 V/ μ s
- CLIMATIC CATEGORY: 55/100/56
- PITCH: 7.5 - 27.5 mm
- STANDARDS/APPROVALS: IEC 60384-13, IEC 60384-16
AEC-Q200 (ON REQUEST)

- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: DOUBLE METALLIZED AND METALLIZED
- CAPACITOR RANGE: 680 pF - 0.22 μ F
- RATED DC VOLTAGE: 250 - 2000 V
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$, $\pm 20\%$
- PULSE LOADING: 300 - 7000 V/ μ s
- CLIMATIC CATEGORY: 55/100/56
- PITCH: 7.5 - 27.5 mm
- STANDARDS/APPROVALS: IEC 60384-16, IEC 60384-17
AEC-Q200 (ON REQUEST)

- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: METALLIZED
- CAPACITOR RANGE: 1000 pF - 6.8 μ F
- RATED DC VOLTAGE: 250 - 1600 V
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$, $\pm 20\%$
- PULSE LOADING: 45 - 4500 V/ μ s
- CLIMATIC CATEGORY: 55/100/56
- PITCH: 10 - 27.5 mm
- STANDARDS/APPROVALS: IEC 60384-16
AEC-Q200 (ON REQUEST)

MKT CAPACITORS

KEU1910



KEA1xxx








- DIELECTRIC: POLYESTER FILM
- ELECTRODES: METALLIZED
- CAPACITOR RANGE: 1000 pF - 22 μ F
- RATED DC VOLTAGE: 63 - 2000 V
- CAPACITANCE TOLERANCE: ± 5 %, ± 10 %, ± 20 %
- PULSE LOADING: 2.5 - 90 V/ μ s
- CLIMATIC CATEGORY: 55/100/56
- PITCH: 10 - 27.5 mm
- STANDARDS/APPROVALS: IEC 60384-2
AEC-Q200 (ON REQUEST)

- DIELECTRIC: POLYESTER FILM
- ELECTRODES: METALLIZED
- CAPACITOR RANGE: 0.47 μ F - 2.2 μ F
- RATED DC VOLTAGE: 100 V
- CAPACITANCE TOLERANCE: ± 20 %
- PULSE LOADING: 5 V/ μ s
- CLIMATIC CATEGORY: -40 °C to 100 °C

Y2 CAPACITORS


KNB252x







- DIELECTRIC: POLYPROPYLENE FILM
- RATED AC VOLTAGE: 250 V, 300 V
- CAPACITANCE RANGE: 1000 - 150000 pF
- CAPACITANCE TOLERANCE: ± 10 %, ± 20 %
- CLIMATIC CATEGORY: 40/100/56
- STANDARDS/APPROVALS:    
IEC/UL 60384-14
AEC-Q200 (ON REQUEST)


X2 CAPACITORS

KNB156x



- DIELECTRIC: POLYPROPYLENE FILM
- RATED AC VOLTAGE: 275 V, 300 V
- CAPACITANCE RANGE: 0.01 - 6.8 μ F
- CAPACITANCE TOLERANCE: $\pm 10\%$, $\pm 20\%$
- CLIMATIC CATEGORY: 40/110/56; 40/125/56
- STANDARDS/APPROVALS:
 -    
 - IEC/UL 60384-14
 - AEC-Q200 (ON REQUEST)



KNB153x



- DIELECTRIC: POLYPROPYLENE FILM
- RATED AC VOLTAGE: 275 V, 300 V
- CAPACITANCE RANGE: 0.01 - 10 μ F
- CAPACITANCE TOLERANCE: $\pm 10\%$, $\pm 20\%$
- CLIMATIC CATEGORY: 40/100/56
- STANDARDS/APPROVALS:
 -    
 - IEC/UL 60384-14
 - AEC-Q200 (ON REQUEST)




KNR153x RC-units



- DIELECTRIC: POLYPROPYLENE FILM
- RATED AC VOLTAGE: 275 V
- CAPACITANCE RANGE: 0.01 - 0.47 μ F, R = 2.2 - 470 Ω
- CAPACITANCE TOLERANCE: $\pm 10\%$, $\pm 20\%$
- CLIMATIC CATEGORY: 40/100/56
- STANDARDS/APPROVALS:
 -  
 - IEC/UL 60384-14
 - AEC-Q200 (ON REQUEST)

KNB158x



- DIELECTRIC: POLYPROPYLENE FILM
- RATED AC VOLTAGE: 310 V
- CAPACITANCE RANGE: 0.01 - 15 μ F
- CAPACITANCE TOLERANCE: $\pm 10\%$, $\pm 20\%$
- CLIMATIC CATEGORY: 40/110/56
- STANDARDS/APPROVALS:
 -   
 - IEC/UL 60384-14
 - AEC-Q200 (ON REQUEST)

POWER CAPACITORS

DC LINK CAPACITORS

KNG191x



- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: METALLIZED
- RATED CAPACITANCE: 0.1 - 480 μ F
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$
- RATED DC VOLTAGE: 450 - 1300 V
- CLIMATIC CATEGORY: 40/085/56
- LIFE EXPECTANCY: >100 000 HOURS AT U_{NDC}
- TERMINAL: PARALLEL TINNED COPPER WIRE (2, 4 or 12 pins)
- STANDARDS/APPROVALS: IEC 61071
AEC-Q200 (ON REQUEST)

**KNG204x
KNG304x**



- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: METALLIZED
- RATED CAPACITANCE: 75 - 1740 μ F
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$
- RATED DC VOLTAGE: 600 - 2200 V
- CLIMATIC CATEGORY: 40/085/56
- LIFE EXPECTANCY: >100 000 HOURS AT U_{NDC}
- TERMINAL: FEMALE: M6x10
MALE: M8x23
- STANDARDS/APPROVALS: IEC 61071, UL 810



HEV/EV



- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: METALLIZED
- RATED CAPACITANCE: 300 - 1100 μ F
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$
- RATED DC VOLTAGE: 450 - 800 V
- CLIMATIC CATEGORY: -40 °C to 85 °C
- LIFE EXPECTANCY: >100 000 HOURS AT U_{NDC}
- TERMINAL: TINNED COPPER
- STANDARDS/APPROVALS: IEC 61071

SNUBBER CAPACITORS

KNO19Ax



- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: DOUBLE METALLIZED AND METALLIZED
- RATED CAPACITANCE: 0.047 - 8 μ F
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$
- RATED DC VOLTAGE: 630 - 3000 V
- CLIMATIC CATEGORY: 40/085/56
- LIFE EXPECTANCY: >100 000 HOURS AT U_{NDC}
- TERMINAL: FIXING LUGS FOR M6 OR M8 SCREWS
- STANDARDS/APPROVALS: IEC 61071
AEC-Q200 (ON REQUEST)

KNO19Bx



- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: DOUBLE METALLIZED AND METALLIZED
- RATED CAPACITANCE: 0.047 - 8 μ F
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$
- RATED DC VOLTAGE: 630 - 3000 V
- CLIMATIC CATEGORY: 40/085/56
- LIFE EXPECTANCY: >100 000 HOURS AT U_{NDC}
- TERMINAL: FIXING LUGS FOR M6 OR M8 SCREWS
- STANDARDS/APPROVALS: IEC 61071
AEC-Q200 (ON REQUEST)

KNO191x



- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: DOUBLE METALLIZED AND METALLIZED
- RATED CAPACITANCE: 0.047 - 8 μ F
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$
- RATED DC VOLTAGE: 630 - 3000 V
- CLIMATIC CATEGORY: 40/085/56
- LIFE EXPECTANCY: >100 000 HOURS AT U_{NDC}
- TERMINAL: PARALLEL TINNED COPPER WIRE (2 or 4 pins)
- STANDARDS/APPROVALS: IEC 61071
AEC-Q200 (ON REQUEST)

POWER CAPACITORS

SWITCHING CAPACITORS

KNP191x

NEW



- DIELECTRIC: POLYPROPYLENE FILM
- ELECTRODES: METALLIZED
- RATED CAPACITANCE: 0.018 - 100 μ F
- CAPACITANCE TOLERANCE: $\pm 5\%$, $\pm 10\%$
- RATED DC VOLTAGE: 160 - 2500 V
- CLIMATIC CATEGORY: 40/105/56
- LIFE EXPECTANCY: >100 000 HOURS
- TERMINAL: PARALLEL TINNED COOPER WIRE
- STANDARDS/APPROVALS: IEC 61071
AEC-Q200 (ON REQUEST)


MAJOR CUSTOMERS



CERTIFICATES



CAPACITORS FOR AUTOMOTIVE APPLICATIONS

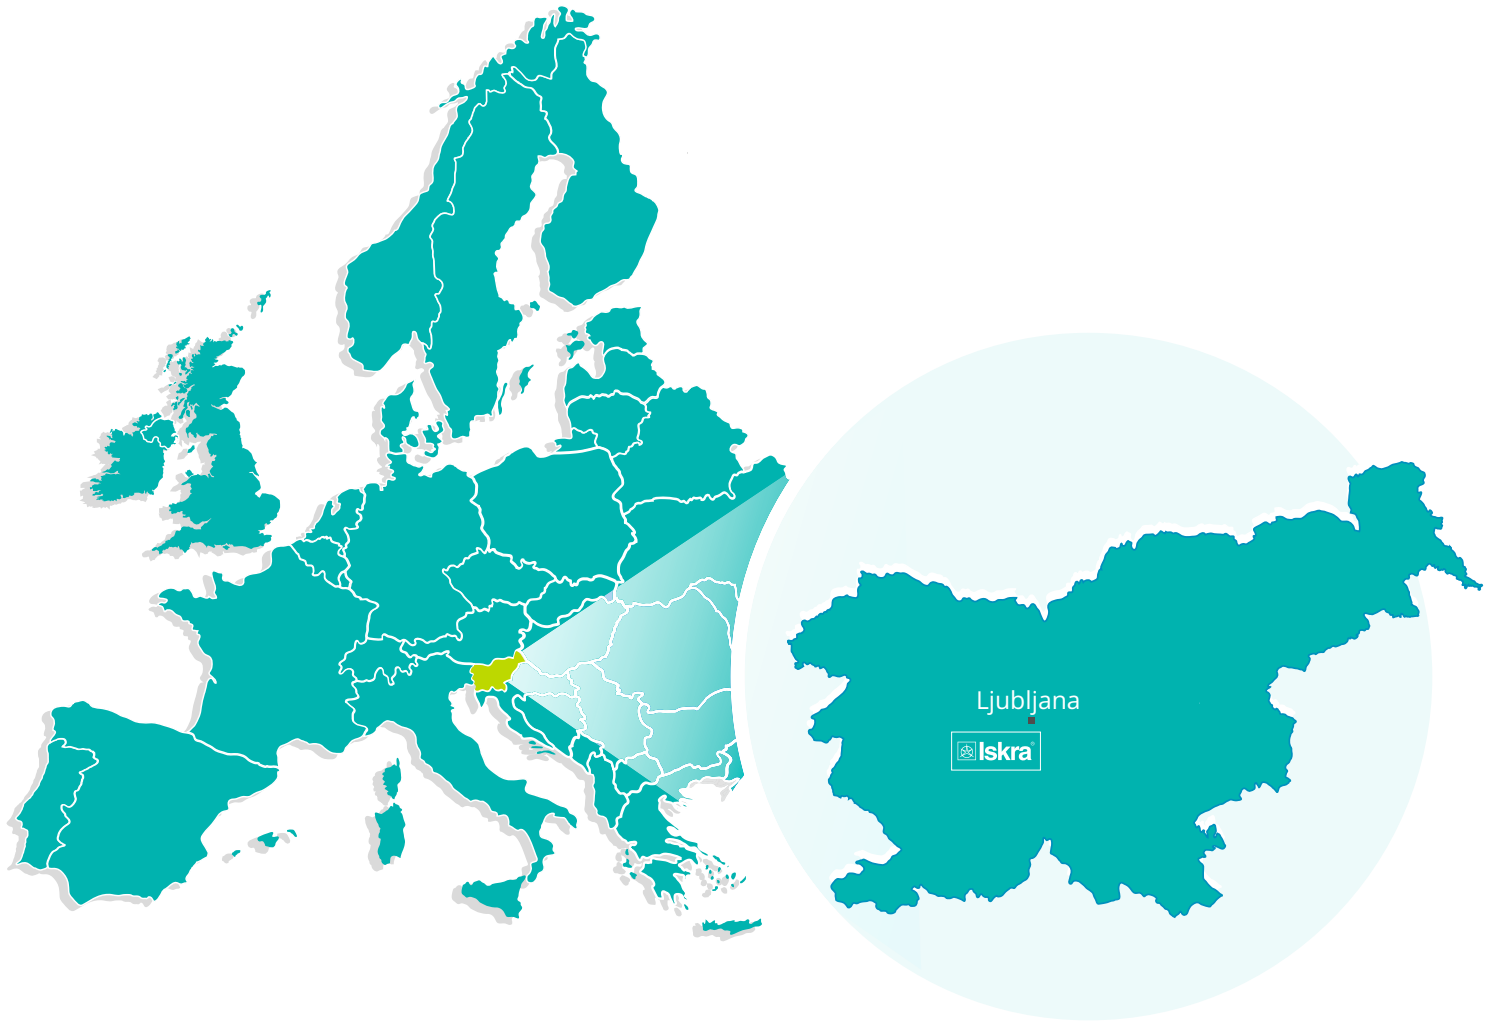

PE Ljubljana

Stegne 21
SI-1000, Ljubljana
Phone: +386 1 513 10 00

PE Kondenzatorji

Vajdova ulica 71
SI-8333, Semič
Phone: +386 7 38 49 200

PE MIS

Ljubljanska c. 24a
SI-4000, Kranj
Phone: +386 4 237 21 12

PE Baterije in potenciometri

Šentvid pri Stični 108
SI-1296, Šentvid pri Stični
Phone: +386 1 780 08 00

PE Galvanotehnika

Glinek 5
SI-1291, Škofljica
Phone: +386 1 366 80 50

Iskra IP, d.o.o.

Vajdova ulica 71
SI-8333, Semič
Phone: +386 7 384 94 54

Iskra Lotrič, d.o.o.

Ljubljanska cesta 24a
SI-4000, Kranj
Phone: +386 4 535 91 68

Iskra ODM, d.o.o.

Ljubljanska cesta 24a
SI-4000, Kranj
Phone: +386 4 237 21 12

Iskra STIK, d.o.o.

Ljubljanska cesta 24a
SI-4000, Kranj
Phone: +386 4 237 22 33

Iskra Tela L, d.o.o.

Omladinska 66
78250, Laktaši
Phone: +387 51 535 890

Iskra Sistemi - M dooel

Ul, Dame Gruev br. 16/5 kat
1000, Skopje
Phone: +389 75 444 498

Iskra Commerce, d.o.o.

Hadži Nikole Živkoviča br. 2
11000, Beograd
Phone: +381 11 328 10 41

Iskra Hong Kong Ltd.

33 Canton Road, T.S.T.
1705, China HK City
Phone: +852 273 00 917
+852 273 01 020

Iskra INDIA Pvt Ltd.

3 shree Ganesh Glory
Appartment Nakshtra
Colony Near Akashwani
Kendra, Nashik
Phone: +91 253 2346161
+91 909 6900893



Iskra, d.o.o.

Stegne 21
SI-1000 Ljubljana, Slovenia

Phone: +386 (0) 1 513 10 00
www.iskra.eu